




PAC-KITS®

Increase sales and reduce comebacks with Four Seasons' PAC-KITS!

Don't risk your reputation and profitability by replacing just the compressor. Do the job right and increase customer satisfaction when you install all of the components essential for extended compressor life. Each Four Seasons PAC-KIT includes all of the components necessary to do a complete compressor job:

- Compressor (New or Re-engineered)
 - ▶ Most of our compressors come from the factory pre-charged with ICE32 (\$30 retail value)!
- Accumulator or Receiver/Filter Drier
- Expansion Device
- Oil
- Flush

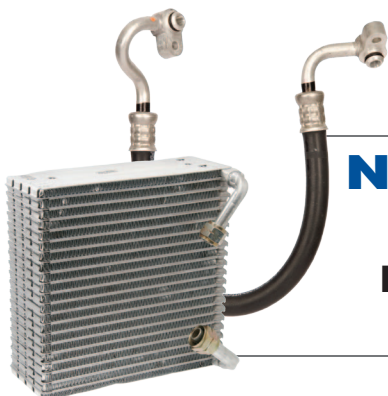

Need a hose assembly or evaporator too? No problem!

Four Seasons has your part, just add it to the PAC-KIT invoice!

Now Available through Activant and Wrenthead!

Over 4,200 Kits!

12,314 Applications!


186+ Million VIO!



Contact Your Local Territory Manager for Details



Doing the job right takes more than just replacing the compressor...

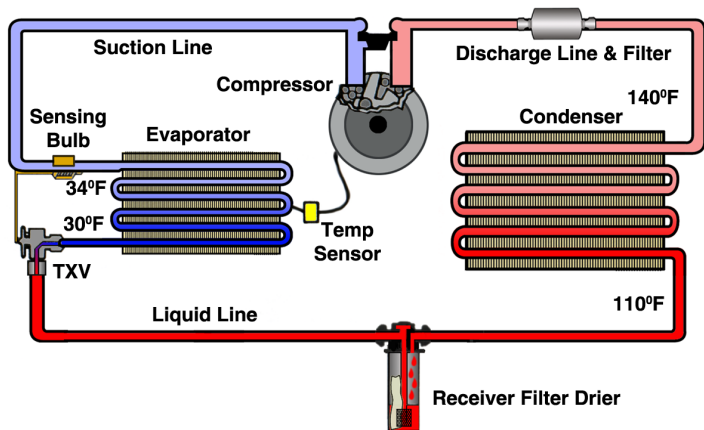

It is imperative that you replace all the necessary components to ensure increased customer satisfaction and extended compressor life!

why is this so important?



orifice tube

Reason to replace:

The orifice tube meters refrigerant flow through the system and also screens trash that may come through. The fine mesh screen or the internal components of the orifice tube can become plugged restricting refrigerant and lubricant flow.



expansion valves

Reason to replace:

Expansion Valves regulate refrigerant flow within in the system. Other than the compressor, this is the only other moving part. Expansion Valves can become contaminated with system debris and should be replaced.



accumulator/receiver driers

Reason to replace:

Receiver Driers keeps moisture from permeating in the system and minimizes deterioration of refrigerant and lubricant. It is essential to replace with the compressor to avoid compressor or system failure.



flush

Why Flush?

Flushing removes dirty oil from the system and is crucial when replacing a compressor to avoid contaminating the system. Items that should be flushed when replacing a compressor include, condenser*, evaporator and hoses.

*Multi-pass condensers cannot be flushed and should be replaced.

